



HAL
open science

Ultra-high gain transmitarray antenna for wireless backhauling at 280 GHz

Orestis Koutsos, Francesco Foglia Manzillo, Antonio Clemente, Mathieu Caillet, Ronan Sauleau

► **To cite this version:**

Orestis Koutsos, Francesco Foglia Manzillo, Antonio Clemente, Mathieu Caillet, Ronan Sauleau. Ultra-high gain transmitarray antenna for wireless backhauling at 280 GHz. IRMMW-THz2022 - The 47th International Conference on Infrared, Millimeter and Terahertz Waves, Feb 2022, Delft, Netherlands. cea-03637090

HAL Id: cea-03637090

<https://hal-cea.archives-ouvertes.fr/cea-03637090>

Submitted on 11 Apr 2022

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

Ultra-high Gain Transmitarray Antenna for Wireless Backhauling at 280 GHz

Orestis Koutsos^{1,2}, Francesco Foglia Manzillo¹, Antonio Clemente¹, Mathieu Caillet¹ and Ronan Sauleau²

¹CEA-Leti, Univ. Grenoble-Alpes, 38054 Grenoble, France

²Univ. Rennes, CNRS, IETR – UMR 6164, 35000 Rennes, France

Abstract — An ultra-high gain transmitarray antenna for point-to-point backhaul links at 280 GHz is presented here. The proposed array exhibits a 3-bit phase resolution, comprising only three metal layers and no metallized vias. Thanks to a dedicated synthesis procedure, the unit-cells achieve very low losses, full phase coverage and are compatible with a standard printed circuit board process. A 140×140-element transmitarray is numerically optimized and experimentally characterized, using a 10 dBi horn as a feed. A peak gain of 44.5 dBi with 52.3% aperture efficiency and 0.9° half-power beamwidth are reported at the center frequency.

I. INTRODUCTION

THE use of the unregulated sub-THz spectrum around 300 GHz can be a key enabler for future high-speed wireless communications, enabling unprecedented data-rate capability. In this beyond-5G network vision, one of the most important blocks is the point-to-point backhaul, which should support fixed links for stationary outdoor connections over range up to a hundred of meters. These systems require naturally ultra-directive antennas with high radiation efficiency, to compensate for the extremely high propagation losses.

The key to achieving ultra-high gain with good performance is the selection of a low-loss beamforming architecture. Classical dielectric lenses [1], quasi-optical systems [2] and waveguide-based corporate-feed slot arrays [3] have been recently proposed for sub-THz applications. However, dielectric lens antennas are bulky and with limited beam-steering capability. Moreover, at these frequencies, they become sensitive to manufacturing and achieve reduced radiation efficiency due to the dielectric losses. In the case of the quasi-optical networks and the corporate-feed arrays, their implementation requires expensive micromachining techniques to attain low-loss and broadband performance. These costly fabrication processes are not suitable for the expected massive antenna deployment in densified networks.

Transmitarrays (TAs) are an attractive alternative solution to the aforementioned antenna systems. Thanks to the spatial feed mechanism, they do not require lossy feed networks, they are generally thin and compatible with standard printed circuit board (PCB) technology. However, most TAs demonstrated at sub-THz frequencies are limited in gain (< 25 dBi) and aperture efficiency (< 25%) [4]. Alternatively, they include multiple through-vias and metal layers [5] and leverage on costly fabrication techniques, such as low temperature co-fired ceramic (LTCC) process, to reach high gain.

An ultra-high gain TA antenna, fabricated using standard PCB technology at 280 GHz, is presented here. The array comprises only three metal layers and no vias, easing the fabrication process. The unit-cell (UC) theoretically provides nearly perfect transmission and complete phase coverage [6].

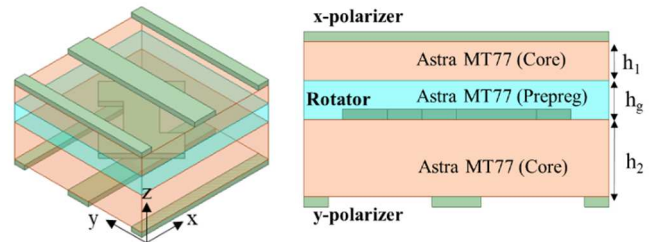


Fig. 1. 3D view (left) and stack-up (right) of the proposed PCB-based unit-cell.

By optimizing only the inner metal layer, a 3-bit TA design has been realized. To the best of authors' knowledge, this is the first antenna fabricated in PCB technology that exhibits a gain greater than 40 dBi operating at such high frequencies.

II. UNIT-CELL DESIGN

The proposed stacked UC comprises two linear polarizers arranged orthogonally on the outer surfaces and a polarization rotator placed in the middle layer, as shown in Fig. 1. The extended study and the design procedure of this topology were reported in [7]. This structure can achieve nearly perfect transmission in a relatively large bandwidth, rotating the polarization of an incoming linearly-polarized wave by 90°. The thicknesses of the substrates and the bonding film are set to $h_1 = h_g = 64 \mu\text{m}$ and $h_2 = 127 \mu\text{m}$, in order to space apart the layers by a distance close to a quarter of the wavelength in the dielectric. The length of the edge of the square UC is set to 500 μm ($\lambda_0/2$ at 300 GHz) to avoid grating lobes in the operating band (260-300 GHz).

In order to make the element suitable for standard PCB manufacturing and achieve high phase-resolution, different rotator designs were employed. Four shapes with a dipole-like geometry were found. By mirroring the rotators with respect to the x-axis, four additional UCs were realized, resulting in a 3-bit TA design. The common 1-dB transmission bandwidth of the eight unit-cells is about 85 GHz, or 30% at the center frequency of 280 GHz. Therefore, the insertion loss is less than 1 dB in the operating band. Thanks to the mirroring approach, the relative phase errors are minimized, presenting maximum absolute variations of 10°. Despite the different rotator shapes, the relative phase shifts among adjacent phase states are very close to 45°, as shown in Fig. 2.

III. ANTENNA DESIGN

To facilitate the study of electrically large TAs, a numerical simulation tool, presented in [8], was employed to synthesize the TA and evaluate its performance. To achieve a gain close to 45 dBi, a 140×140 TA ($70 \times 70 \lambda_0^2$ at 300 GHz) is optimized when illuminated by a standard gain horn (model 32240-10 by Flann Microwave) with a nominal gain of 10 dBi. The horn is

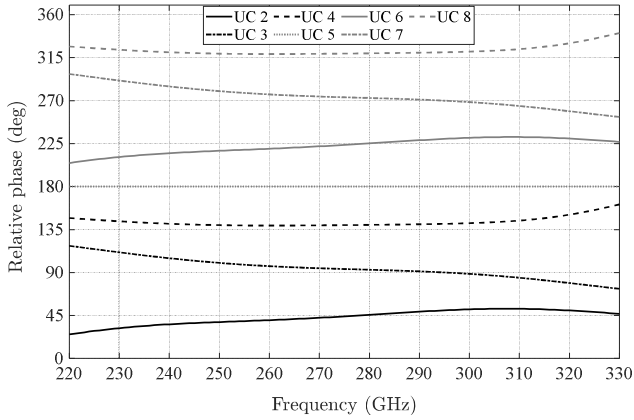


Fig. 2. Simulated relative phase of the transmission coefficient of the eight unit-cells, with UC 1 used as a reference. The UCs 5 – 8 comprise the mirrored design of the rotators in UCs 1 – 4, respectively, exhibiting exactly 180° phase difference. This can be seen clearly in the relative phase of UC 5, with respect to that of UC 1.

mounted on a WR3 waveguide. The optimal phase distribution is derived numerically, employing the simulated radiation pattern and scattering parameters of the focal source and the unit-cells, respectively. For a central frequency of 280 GHz, the focal distance for maximum aperture efficiency was set at $F = 42$ mm, resulting in a focal-to-diameter ratio $F/D = 0.6$.

The simulated gain and aperture efficiency are plotted versus frequency in Fig. 3. The peak gain is 44.5 dBi at 280 GHz and the corresponding aperture efficiency is 52.3%. The 3-dB gain relative bandwidth is about 6%, from 272 to 289 GHz. The half-power beamwidth (HPBW) is only 0.9°, as shown in Fig 4. The corresponding first sidelobe level is lower than -16.7 dB. The prototype has been characterized at CEA-Leti in a far-field antenna measurement facility. The measurement distance in the anechoic chamber is around 11 meters. A quick estimation of the antenna's far-field gives 19.6 m at 300 GHz, using the diagonal size of the TA as the largest dimension. Although the effective aperture is smaller, due to the non-uniform illumination of the array, the estimated value remains less than half of the measurement distance. Therefore, a gain error in the order of 0.1 dB as well as an increased sidelobe level should be expected. Nevertheless, a good agreement between simulated and measured radiation pattern is observed, validating the performance and the design approach.

IV. CONCLUSION

An ultra-high gain transmitarray antenna, fabricated in standard printed circuit board technology was presented and experimentally validated. The low-cost prototype achieves very high aperture efficiency (52.3%) that is comparable to very expensive antenna technologies, paving the way for the integration of the proposed design in future long-range wireless communications at sub-THz frequencies.

ACKNOWLEDGMENT

This work was supported in part by the National Research Agency (ANR) through the project “Next5” under Grant ANR 18-CEA 25-0009-01.

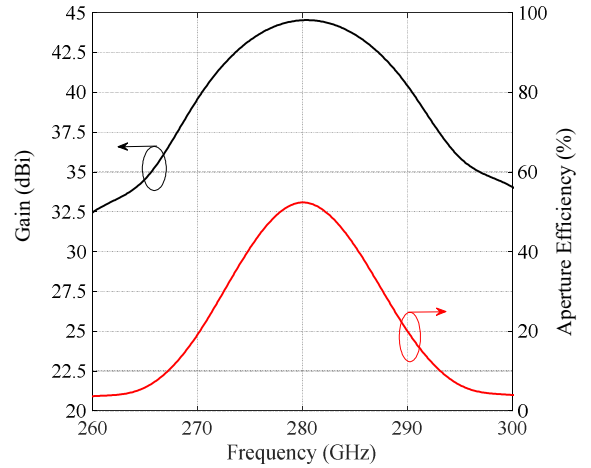


Fig. 3. Simulated gain and aperture efficiency of the proposed TA antenna.

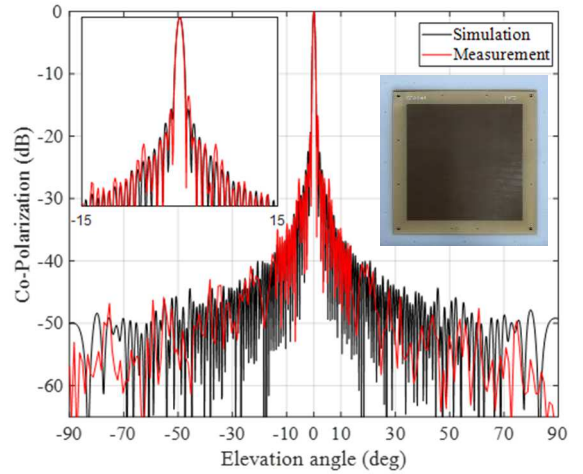


Fig. 4. Simulated and measured co-polarized radiation pattern in the E-plane at 280 GHz. A photograph of the TA prototype is shown in the right side.

REFERENCES

- [1] M. A. Campo *et al.*, "Wideband circularly polarized antenna with in-lens polarizer for high-speed communications," *IEEE Trans. Antennas Propag.*, vol. 69, no. 1, pp. 43-54, Jan. 2021.
- [2] A. Gomez-Torrent *et al.*, "A low-profile and high-gain frequency beam steering subterahertz antenna enabled by silicon micromachining," *IEEE Trans. Antennas Propag.*, vol. 68, no. 2, pp. 672-682, Feb. 2020.
- [3] A. Gomez-Torrent *et al.*, "A 38 dB gain, low-loss, flat array antenna for 320–400 GHz enabled by silicon-on-insulator micromachining," *IEEE Trans. Antennas Propag.*, vol. 68, no. 6, pp. 4450-4458, June 2020.
- [4] K. Medrar *et al.*, "H-Band substrate-integrated discrete-lens antenna for high data rate communication systems," *IEEE Trans. Antennas Propag.*, vol. 69, no. 7, pp. 3677-3688, July 2021.
- [5] Z. -W. Miao *et al.*, "140 GHz high-gain LTCC-integrated transmit-array antenna using a wideband SIW aperture-coupling phase delay structure," *IEEE Trans. Antennas Propag.*, vol. 66, no. 1, pp. 182-190, Jan. 2018.
- [6] O. Koutsos, F. Foglia Manzillo, A. Clemente and R. Sauleau, "Analysis and efficient design of sub-THz transmitarrays with three anisotropic layers," in *15th Eur. Conf. Antennas Propag. (EuCAP)*, Dusseldorf, Germany, 2021, pp. 1-5.
- [7] O. Koutsos, F. Foglia Manzillo, A. Clemente, and R. Sauleau, "Analysis, rigorous design and characterization of a three-layer anisotropic transmitarray at 300 GHz," *IEEE Trans. Antennas Propag. (Early Access)*, Jan. 2022.
- [8] H. Kaouach, L. Dussopt, J. Lanteri, T. Koleck, and R. Sauleau, "Wideband low-loss linear and circular polarization transmit-arrays in V-band," *IEEE Trans. Antennas Propag.*, vol. 59, no. 7, pp. 2513-2523, July 2011.