

# Spectral-phase interferometry for direct electric-field reconstruction applied to seeded extreme-ultraviolet free-electron lasers

B. Mahieu, D. Gauthier, G. De Ninno, H. Dacasa, M. Lozano, J.-P. Rousseau,  
P. Zeitoun, D. Garzella, H. Merdji

► **To cite this version:**

B. Mahieu, D. Gauthier, G. De Ninno, H. Dacasa, M. Lozano, et al.. Spectral-phase interferometry for direct electric-field reconstruction applied to seeded extreme-ultraviolet free-electron lasers. *Optics Express*, Optical Society of America, 2015, 23 (14), pp.17665-17674. 10.1364/OE.23.017665 . cea-01245772

**HAL Id: cea-01245772**

**<https://hal-cea.archives-ouvertes.fr/cea-01245772>**

Submitted on 9 Oct 2019

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

# Spectral-phase interferometry for direct electric-field reconstruction applied to seeded extreme-ultraviolet free-electron lasers

Benoît Mahieu,<sup>1,\*</sup> David Gauthier,<sup>2</sup> Giovanni De Ninno,<sup>3,2</sup> Hugo Dacasa,<sup>1</sup> Magali Lozano,<sup>1</sup> Jean-Philippe Rousseau,<sup>1</sup> Philippe Zeitoun,<sup>1</sup> David Garzella,<sup>4</sup> and Hamed Merdji<sup>4</sup>

<sup>1</sup>*Laboratoire d'Optique Appliquée, UMR 7639, ENSTA-CNRS-Ecole Polytechnique, Chemin de la Lumière, 91761 Palaiseau, France*

<sup>2</sup>*Sincrotrone Trieste Elettra, S.S.14 km 163.5 in AREA Science Park, 34149 Basovizza, Italy*

<sup>3</sup>*Laboratory of Quantum Optics, University of Nova Gorica, Vipavska 11c, 5270 Ajdovščina, Slovenia*

<sup>4</sup>*Service des Photons Atomes et Molécules, Centre d'Etudes de Saclay, Commissariat à l'Energie Atomique, Bâtiment 522, 91191 Gif-sur-Yvette, France*

compiled: September 4, 2018

We present a setup for complete characterization of femtosecond pulses generated by seeded free-electron lasers (FEL's) in the extreme-ultraviolet spectral region. Two delayed and spectrally shifted replicas are produced and used for spectral phase interferometry for direct electric field reconstruction (SPIDER). We show that it can be achieved by a simple arrangement of the seed laser. Temporal shape and phase obtained in FEL simulations are well retrieved by the SPIDER reconstruction, allowing to foresee the implementation of this diagnostic on existing and future sources. This will be a significant step towards an experimental investigation and control of FEL spectral phase.

In recent years, seeded free-electron lasers (FEL's) have demonstrated to be very attractive sources for intense light production, revealing improved shot-to-shot stability, tunability, spatial quality and longitudinal coherence [1–3]. Notably, the high-gain harmonic generation (HG) scheme [4] enables the generation of powerful and ultrashort extreme-ultraviolet (XUV) pulses. In such a configuration, an external source (the seed) interacts with a relativistic electron beam wiggling in a first undulator chain (the modulator). This interaction leads to an energy modulation of the electrons, further transposed to a spatial bunching after the electrons experience an energy-dependent path into a magnetic chicane, called the dispersive section. The bunched electron beam is then injected into a long undulator chain (the radiator). The bunching has a periodicity determined by the seed frequency but also presents significant components at the harmonics of the latter, so that the electron beam can emit coherently at one of the seed harmonics. In the radiator, the light is amplified at the chosen harmonic until the process reaches saturation, due to bunching deterioration.

In ideal conditions, the spectro-temporal properties of HG mimic those of the seed [1], that is usually a Gaussian quasi-monochromatic pulse (e.g., from

a Ti:Sapphire laser or an harmonic of the latter). However, due to the possibility of spectral phase distortion during amplification [5], pure spectral diagnostics does not allow for inferring the temporal pulse shape. Few techniques have been tested on FEL's for directly measuring the temporal profile. They usually rely on photoionization in gaseous targets and remain rather complicated to implement. In their standard layouts, auto-correlation [6] and cross-correlation [7] require a multi-shot scan (implying source stability). They are thus not suitable for providing, in real time, diagnostic and interconnection with experiments. In addition, autocorrelation cannot resolve pulse asymmetries. More accurate, terahertz streaking spectroscopy [8] needs, as cross-correlation, an external source. Overall, these three techniques do not lift the uncertainty on the spectral phase, which is a crucial piece of information for a complete electric field reconstruction required by the users, and for a better understanding of FEL gain dynamics. Spectral phase interferometry for direct electric field reconstruction (SPIDER) has the potential for obtaining accurate and complete spectro-temporal information [9] on a single shot by means of an inexpensive setup. The technique consists in measuring the spectral interference between the pulse itself and a replica delayed in time and slightly shifted in frequency. A direct inversion procedure of the interferogram yields the electric field of the pulse.

Though the implementation of a classical SPIDER ap-

---

\* Corresponding author: benoit.mahieu@ensta-paristech.fr

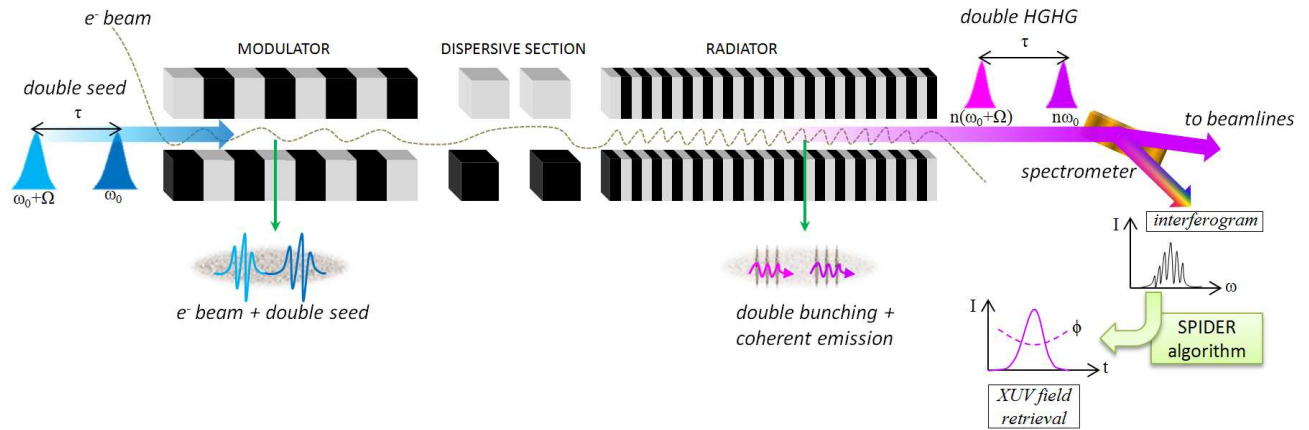


Fig. 1. Setup for XUV SPIDER on HGHG FEL. The first seed pulse, of central frequency  $\omega_0$ , and its replica, delayed by  $\tau$  and spectrally shifted by  $\Omega$ , overlap in space and time with a relativistic electron beam wiggling into the modulator. After the dispersive section, the interaction gives rise to bunching at both seed positions, so that double FEL emission occurs in the radiator, at the harmonic number  $n$  of the seed frequencies. The two successive XUV pulses are sent to the spectrometer, which records their interferometric pattern. The latter is analyzed by the direct SPIDER algorithm so that the complete field of the XUV emission is retrieved. In parallel of the measurement, the direct beam (zero-th diffraction order of the spectrometer's grating) is sent to users beamlines.

paratus remains rather simple at infrared, visible or even deep-ultraviolet wavelengths (at which it has been used on FEL pulses [10]), the issue of creating a replica at shorter wavelengths leads us to reconsider its arrangement, as was done on high order harmonic generation sources [11, 12]. Following the successful pump-probe experiments on the FERMI FEL facility [13] that were based on a double-seeding scheme, we here show that the same setup is suitable for carrying out SPIDER measurements. The arrangement we propose does not require any further implementation and is totally non-invasive for users since the on-line spectrometer [14] can record the SPIDER interferogram. The layout is shown in Fig. 1. Taking advantage of the HGHG configuration, the requirement of a spectrally-sheared and temporally delayed replica is transferred to the seed before harmonic frequency upconversion to the XUV. The seed is split in two replicas, temporally delayed and spectrally shifted. The successive seed pulses then interact with a sufficiently long and uniform electron bunch, so as to generate two spectrally sheared and temporally delayed FEL pulses. The two replicas of the measured pulse are thus directly produced, while in a classical SPIDER apparatus the pulse under study is indirectly characterized.

As a first step, we wish to show the possibility of generating conveniently two similar seed pulses. An experimental demonstration has been carried out at the Laboratoire d'Optique Appliquée, on a Ti:Sapphire source delivering 5 mJ pulses of duration 45 fs, centered at a wavelength of 815 nm, at a repetition rate of 1 kHz using a Mach-Zehnder setup depicted in Fig. 2. On each arm of the interferometer, a 200  $\mu\text{m}$ -thick BBO type I crystal in the *ooe* configuration has been chosen, thus generating the second harmonic of the fundamental beam, with an efficiency of about 15%. The advantage of a Mach-

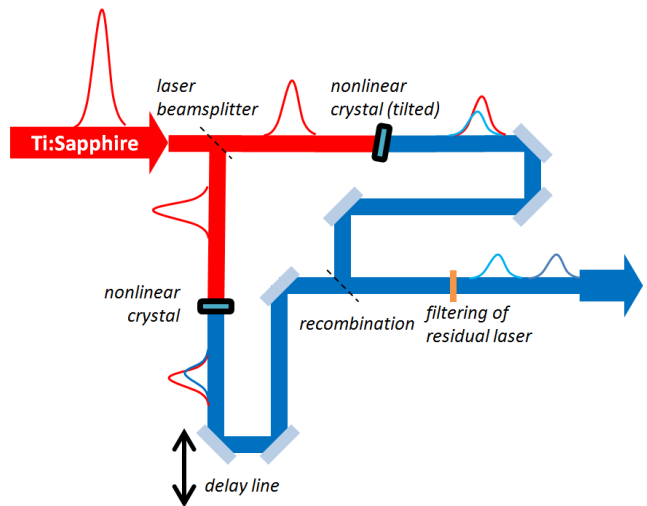


Fig. 2. Test setup for double seed generation. The fundamental laser beam coming from a classical Ti:Sapphire femtosecond source is split in two paths. In each of them, an harmonic is generated in a nonlinear crystal. By slightly tilting a crystal, phase-matching conditions are changed, leading to a small and controllable spectral shift of the generated harmonic. The two beams are then recombined, a micrometric-precision motorized stage allowing to adjust the delay between the two pulses. A filter is eventually placed after recombination to leave out the residual part of the fundamental laser.

Zehnder configuration is to independently control beam properties on each arm so that, as shown in Fig. 3a, two spectrally sheared replicas are easily produced. Incidentally, deeper control, like variable attenuation or spatial shaping, can eventually be done on each arm for further

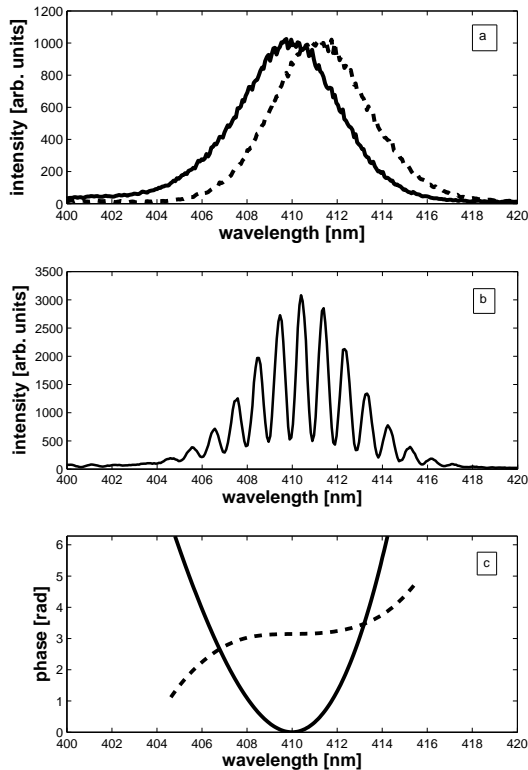


Fig. 3. Experimental characterization of the Mach-Zehnder setup. (a) measured reference spectrum (plain line) and spectrally sheared replica (dashed line, intensity multiplied by a factor 1.5). (b) measured interferogram, with a delay of 600 fs between the two replicas. (c) SPIDER retrieval of the phase with (plain line) and without (dashed line) a 1 cm-thick fused silica plate placed after recombination. Single spectra and interferogram correspond to the integration of 3 successive pulses.

applications.

Before extending our study to the XUV, a SPIDER experimental analysis on the seeding stage under test has been performed. When the two replicas are sent together, with an appropriate delay, to the visible spectrometer, an interferogram is observed, such as shown in Fig. 3b. This trace can then be analyzed by the algorithm described in [15], resulting in the calculation of the spectral phase (Fig. 3c). When no dispersive element is present, a small residual third order dispersion is retrieved (dashed line), probably ensuing from the compressor settings. As expected, quadratic phase shows up when adding dispersive material on the beam path (plain line).

For the FEL simulations, we chose to consider realistic FERMI FEL parameters (see [2, 13, 16]), summarized in Table 1. The seeding wavelength used here, corresponding to the third harmonic of a Ti:Sapphire source, enables to adopt a similar double-seeding scheme as described above.

We need to choose the delay  $\tau$  between the two pulses

Table 1. Main parameters used for simulations. FWHM stands for the full-width at half-maximum value of the intensity. Undulator characteristics can be found in [17].

<i>electron beam</i>	
mean energy	1.2 GeV
energy profile	flat
current profile	flat
peak current	500 A
duration	1 ps
<i>seed pulse</i>	
central wavelength	261 nm
temporal profile	Gaussian
bandwidth FWHM $\Delta\omega_0$	$4.3 \cdot 10^{15} \text{ rad} \cdot \text{s}^{-1}$
energy	10 – 100 $\mu\text{J}$
<i>others</i>	
harmonic number $n$	6
FEL bandwidth FWHM $\Delta\omega_n$	$\sim 1 \cdot 10^{14} \text{ rad} \cdot \text{s}^{-1}$
spectrometer resolution $d\omega_n$	$2.13 \cdot 10^{12} \text{ rad} \cdot \text{s}^{-1}$

according to two conditions. First, in order to have a correct fringe resolution on the spectrometer detector,  $\tau$  must be smaller than  $\pi/d\omega_n = 1.5 \text{ ps}$ . Also, to obtain enough fringes,  $\tau$  must be higher than  $4\pi/\Delta\omega_n \approx 100 \text{ fs}$ . We thus choose  $\tau = 600 \text{ fs}$ . Then, the spectral shear between the interfering FEL pulses, equal to  $n\Omega$ , has to be chosen so as to satisfy the Whittaker-Shannon criterion, that is  $n\Omega < 2\pi/T$ , where  $T$  is the time interval within which the FEL pulse is expected to be contained. A value of  $T = 200 \text{ fs}$  seems reasonable, which gives  $n\Omega \approx 5 \cdot 10^{12} \text{ rad} \cdot \text{s}^{-1}$ . This corresponds, on the seed pulses, to a shear of 0.2 nm in terms of wavelength. We opt for a value of 0.1 nm in the simulations i.e., 10% of the bandwidth. The FEL simulations have been carried out with the Perseo code [18]. The simulation output provides the temporal profile of the FEL emission and, by Fourier transform, the FEL spectrum that is the SPIDER interferogram. Besides, noise is artificially added to the interferogram and a background threshold is taken into account, so as to come closer to the experiment. Furthermore, in order to consider possible uncertainties and inhomogeneities (seed and current shape, phase and bandwidth of the seed pulses, slice emittance and energy spread along the electron beam, relative intensity of FEL pulses, etc.), the output phase and amplitude have been independently multiplied by a random error included within a range of  $\pm 5\%$  of the calculated value.

Seed pulses with flat phase are first considered. The output of the simulation is shown in Fig. 4. As expected, the shapes of the FEL pulses mirror the one of the seed i.e., a Gaussian profile (Fig. 4a). Both are 60 fs-long (measured at FWHM) and their phases have very low distortions. The spectral interference pattern (Fig. 4b)

of the FEL emission presents about 10 fringes within a wavelength window of  $0.1 \text{ nm}$ . According to the FERMI spectrometer resolution at  $43.5 \text{ nm}$  (see Table 1), a maximum number of about 15 fringes can be resolved within this spectral window. The temporal intensity retrieved

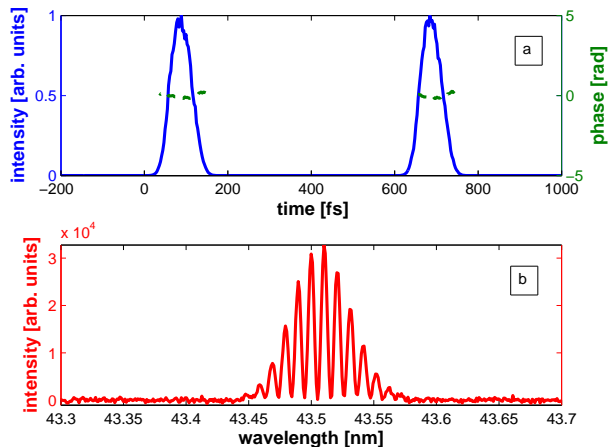


Fig. 4. FEL simulation output with Fourier-transform limited seed pulses. (a) Longitudinal profile (plain line) and phase (line). (b) Spectrum.

by the SPIDER calculation is shown in Fig. 5, where it is overlapped with the first pulse (towards the head of the bunch and negative times in Fig. 4a) of the FEL simulation, taken as the reference one. As it can be seen, the agreement is very satisfactory and the FWHM duration obtained from the SPIDER reconstruction is only slightly shorter than the FEL simulation ( $55 \text{ fs}$ ).

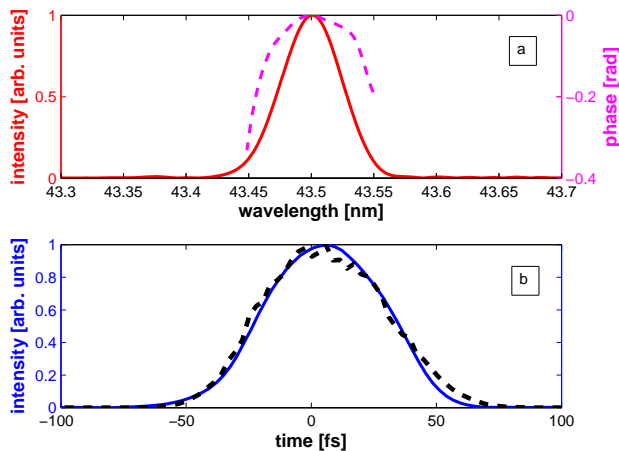


Fig. 5. SPIDER reconstruction corresponding to FEL simulations carried out with Fourier-transform limited seed. (a) Spectrum (plain line) and spectral phase (dashed line). (b) Temporal intensity (plain line) compared to the direct output of the FEL simulation (dashed line).

In order to better test the robustness of the tech-

nique, we investigate thereafter a particular FEL regime. As detailed in [16, 19], in specific conditions (intense seed and/or strong dispersive section, plus chirped seed), the FEL emission temporally splits into two sub-pulses, each with a distinct central wavelength. This two-colour structure can be seen in the SPIDER reconstruction of the spectrum (Fig. 6a). The curve in the temporal domain (Fig. 6b) shows that the reconstruction remains quite good: the split structure is correctly recovered and the duration of each sub-pulse is close to the FEL simulation as is the duration of the overall envelope ( $\approx 300 \text{ fs}$ ). Notably, quite successful SPIDER reconstructions, not

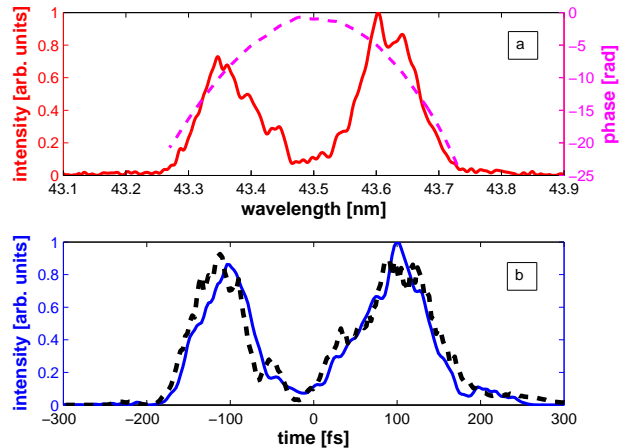


Fig. 6. SPIDER reconstruction corresponding to FEL simulations carried out in double-peak regime. (a) Spectrum (plain line) and spectral phase (dashed line). (b) Temporal intensity (plain line) compared to the direct output of the FEL simulation (dashed line).

shown here, have also been obtained for different kinds of distorted FEL emission, resulting from other specific sets of machine parameters.

Let us now stress the relevance of FEL phase measurement. The theory [20, 21] predicts that the seed phase structure is transferred to the FEL emission. It can nonetheless be distorted depending on the amplification regime. This is clearly observable in Fig. 7, where the FEL emission is associated to a strong dispersive section. The parabola in blue plain line represents the direct phase transfer from the seed to the FEL emission. At positions where there is no saturation (before  $70 \text{ fs}$  and after  $170 \text{ fs}$ , approximately), the FEL phase fits well the parabola. Slight differences can be observed between the FEL phase output and its SPIDER retrieval, due to small dissimilarities of the replicas. They have two main causes: first, the uncertainties that we intentionally inserted within the numerical process; second, longitudinal distortions occurring in deep saturation. Very deep saturations may thus be a limitation of our technique. Nevertheless, this study underlines the attractiveness of FEL SPIDER measurements for investigating the longitudinal gain dynamics in the FEL and the consequences

of errors or high-order terms in the seed phase and of electron beam structurations. More complex regimes, including stronger phase distortions, can then be approached. Such investigations could be experimentally accomplished by performing a SPIDER characterization on the FEL emission and, in parallel, on the seed (see Fig. 3), building therewith a control loop for efficient FEL pulse shaping.

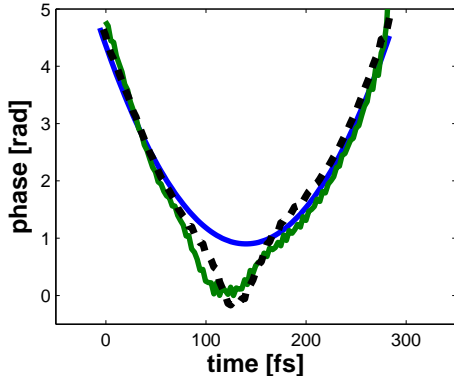


Fig. 7. Calculated distorted FEL phase (dashed line) and its SPIDER reconstruction (green plain line). The parabola in blue plain line represents the direct phase transfer from the seed, calculated as the seed phase times the harmonic order.

To conclude, the feasibility of a SPIDER experiment on a seeded FEL has been demonstrated, especially in the attractive case of XUV radiation produced in a HGHG scheme. The latter does not represent a limit: our scheme can be expanded, for instance, to direct seeding with high order harmonics [3], echo-enabled harmonic generation [22] or self-seeding [23, 24]. The main requirement of the proposed scheme is a sufficiently long and uniform electron bunch, which has already been experimentally achieved. The method is then non-invasive and single-shot, can be performed in real time (together with experiments), and has the great advantage to pull the necessary handling onto the seed instead of electron beam or XUV field. Besides, control of the FEL chirp by the seed makes feasible the generation of Fourier-limited FEL pulses that can then be measured by SPIDER.

We also demonstrated the large scope and the robustness of this method by studying a peculiar case of non-Gaussian, double-peak, emission. The characterization of the latter has a significant interest since such an emission is suitable for XUV pump-probe experiments. Moreover, a single-seed SPIDER experiment in double-peak regime could be foreseen: the split sub-pulses, originating from one seed only, may be two suitable replicas (see Fig. 6).

Finally, experimental demonstration of the XUV FEL SPIDER would allow to measure the effective transfer of the seed phase and possible phase distortions, occurring through FEL amplification in different regimes. This will have an important impact for a better understand-

ing of FEL physics and for further developments, such as the design of chirped-pulse amplification schemes [25–28].

We gratefully acknowledge the COST MP1203 action for its financial support and the FERMI team for constructive discussions.

## References

- [1] G. De Ninno, E. Allaria, M. Coreno, F. Curbis, M. B. Danailov, E. Karantzoulis, A. Locatelli, T. O. Mentès, M. A. Nino, C. Spezzani, and M. Trovò, “Generation of Ultrashort Coherent Vacuum-Ultraviolet Pulses Using Electron Storage Rings: A New Bright Light Source for Experiments”, *Phys. Rev. Lett.* **101**, 053902 (2008).
- [2] E. Allaria, R. Appio, L. Badano, W.A. Barletta, S. Basanese, S.G. Biedron, A. Borga, E. Busetto, D. Castronovo, P. Cinquegrana, S. Cleva, D. Cocco, M. Cornacchia, P. Craievich, I. Cudin, G. DAuria, M. Dal Forno, M.B. Danailov, R. De Monte, G. De Ninno, P. Delgiusto, A. Demidovich, S. Di Mitri, B. Diviacco, A. Fabris, R. Fabris, W. Fawley, M. Ferianis, E. Ferrari, S. Ferry, L. Fröhlich, P. Furlan, G. Gaio, F. Gelmetti, L. Giannessi, M. Giannini, R. Gobessi, R. Ivanov, E. Karantzoulis, M. Lonza, A. Lutman, B. Mahieu, M. Milloch, S.V. Milton, M. Musardo, I. Nikolov, S. Noe, F. Parmigiani, G. Penco, M. Petronio, L. Pivetta, M. Predonzani, F. Rossi, L. Rumiz, A. Salom, C. Scafuri, C. Serpico, P. Sigalotti, S. Spampinati, C. Spezzani, M. Svandrlik, C. Svetina, S. Tazzari, M. Trovò, R. Umer, A. Vascotto, M. Veronese, R. Visintini, M. Zaccaria, D. Zangrando and M. Zangrando, “Highly coherent and stable pulses from the FERMI seeded free-electron laser in the extreme ultraviolet”, *Nat. Photon.* **6**, 699–704 (2012).
- [3] G. Lambert, T. Hara, D. Garzella, T. Tanikawa, M. Labat, B. Carré, H. Kitamura, T. Shintake, M. Bougeard, S. Inoue, Y. Tanaka, P. Salières, H. Merdji, O. Chubar, O. Gobert, K. Tahara and M.-E. Couprie, “Injection of harmonics generated in gas in a free-electron laser providing intense and coherent extreme ultraviolet light”, *Nat. Phys.* **4**, 296 (2008).
- [4] L. H. Yu, “Generation of intense uv radiation by subharmonically seeded single-pass free-electron lasers”, *Phys. Rev. A* **44**, 5178 (1991).
- [5] J. Wu, J. B. Murphy, P. J. Emma, X. Wang, T. Watanabe and X. Zhong, “Interplay of the chirps and chirped pulse compression in a high-gain seeded free-electron laser”, *JOSA B* **24**, 484–495 (2007).
- [6] R. Mitzner, A. A. Sorokin, B. Siemer, S. Roling, M. Rutkowski, H. Zacharias, M. Neeb, T. Noll, F. Siewert, W. Eberhardt, M. Richter, P. Juranic, K. Tiedtke and J. Feldhaus, “Direct autocorrelation of soft-x-ray free-electron-laser pulses by time-resolved two-photon double ionization of He”, *Phys. Rev. A* **80**, 025402 (2009).
- [7] P. Radcliffe, S. Dsterer, A. Azima, H. Redlin, J. Feldhaus, J. Dardis, K. Kavanagh, H. Luna, J. Pedregosa Gutierrez, P. Yeates, E. T. Kennedy, J. T. Costello, A. Delsérieys, C. L. S. Lewis, R. Taïeb, A. Maquet, D. Cubaynes and M. Meyer, “Single-shot characterization of independent femtosecond extreme ultraviolet free electron and infrared laser pulses”, *App. Phys. Lett.* **90**, 131108 (2007).
- [8] I. Grguraš, A. R. Maier, C. Behrens, T. Mazza, T. J. Kelly, P. Radcliffe, S. Dsterer, A. K. Kazansky, N. M.

- Kabachnik, Th. Tschentscher, J. T. Costello, M. Meyer, M. C. Hoffmann, H. Schlarb and A. L. Cavalieri, “Ultrafast X-ray pulse characterization at free-electron lasers”, *Nat. Photon.* **6**, 852–857 (2012).
- [9] C. Iaconis and I. A. Walmsley, “Spectral Phase Interferometry for Direct Electric-Field Reconstruction of Ultrashort Optical Pulses”, *Opt. Lett.* **23**, 792–794 (1998).
- [10] Z. Wu, H. Loos, Y. Shen, B. Sheehy, E. D. Johnson, S. Krinsky, J. B. Murphy, J. Rose, T. Shaftan, X.-J. Wang and L. H. Yu, “Spectral phase modulation and chirped pulse amplification in high gain harmonic generation”, *Proceedings of the 2004 FEL conference*, 285–288.
- [11] Y. Mairesse, O. Gobert, P. Bréger, H. Merdji, P. Meynadier, P. Monchicourt, M. Perdrix, P. Salières and B. Carré, “High Harmonic XUV Spectral Phase Interferometry for Direct Electric-Field Reconstruction”, *Phys. Rev. Lett.* **94**, 173903 (2005).
- [12] E. Cormier, I. A. Walmsley, E. M. Kosik, A. S. Wyatt, L. Corner, and L. F. DiMauro, “High Harmonic XUV Spectral Phase Interferometry for Direct Electric-Field Reconstruction”, *Phys. Rev. Lett.* **94**, 033905 (2005).
- [13] E. Allaria, F. Bencivenga, R. Borghes, F. Capotondi, D. Castronovo, P. Charalambous, P. Cinquegrana, M. B. Danailov, G. De Ninno, A. Demidovich, S. Di Mitri, B. Diviacco, D. Fausti, W. M. Fawley, E. Ferrari, L. Fröhlich, D. Gauthier, A. Gessini, L. Giannessi, R. Ivanov, M. Kiskinova, G. Kurdi, B. Mahieu, N. Mahne, I. Nikolov, C. Masciovecchio, E. Pedersoli, G. Penco, L. Raimondi, C. Serpico, P. Sigalotti, S. Spampinati, C. Spezzani, C. Svetina, M. Trovò and M. Zangrando, “Two-colour pumpprobe experiments with a twin-pulse-seed extreme ultraviolet free-electron laser”, *Nat. Comm.* **4**, 2476 (2013).
- [14] C. Svetina, A. Abrami, I. Cudin, C. Fava, S. Gerusina, R. Gobessi, L. Rumiz, G. Sostero, M. Zangrando, D. Cocco, “Characterization of the FERMI@Elettra’s online photon energy spectrometer”, *Proceedings SPIE 8139, Advances in X-Ray/EUV Optics and Components VI, 81390J* (2011).
- [15] C. Iaconis and I. A. Walmsley, “Self-Referencing Spectral Interferometry for Measuring Ultrashort Optical Pulses”, *IEEE Journal of Quantum Electronics* **35**, 4 (1999).
- [16] B. Mahieu, E. Allaria, D. Castronovo, M. B. Danailov, A. Demidovich, G. De Ninno, S. Di Mitri, W. M. Fawley, E. Ferrari, L. Fröhlich, D. Gauthier, L. Giannessi, N. Mahne, G. Penco, L. Raimondi, S. Spampinati, C. Spezzani, C. Svetina, M. Trovò and M. Zangrando, “Two-colour generation in a chirped seeded Free-Electron Laser: a close look”, *Opt. Exp.* **21**, 22728–22741 (2013).
- [17] FERMI@Elettra Conceptual Design Report.
- [18] L. Giannessi, “Overview of Perseo, a system for simulating FEL dynamics in Mathcad”, *Proceedings of the 2006 FEL conference*, MOPPH026.
- [19] G. De Ninno, B. Mahieu, E. Allaria, L. Giannessi and S. Spampinati, “Chirped Seeded Free-Electron Lasers: Self Standing Light Sources for Two-Color Pump-Probe Experiments”, *Phys. Rev. Lett.* **110**, 064801 (2013).
- [20] G. Stupakov, “Effect of finite pulse length and laser frequency chirp on HGHG and EEHG seeding”, SLAC Report No. SLAC-PUB-14639 (2011).
- [21] D. Ratner, A. Fry, G. Stupakov and W. White, “Laser phase errors in seeded free electron lasers”, *PRST-AB* **15**, 030702 (2012).
- [22] D. Xiang, E. Colby, M. Dunning, S. Gilevich, C. Hast, K. Jobe, D. McCormick, J. Nelson, T. O. Raubenheimer, K. Soong, G. Stupakov, Z. Szalata, D. Walz, S. Weathersby, M. Woodley and P.-L. Pernet, “Demonstration of the Echo-Enabled Harmonic Generation Technique for Short-Wavelength Seeded Free Electron Lasers”, *Phys. Rev. Lett.* **105**, 114801 (2010).
- [23] J. Amann, W. Berg, V. Blank, F.-J. Decker, Y. Ding, P. Emma, Y. Feng, J. Frisch, D. Fritz, J. Hastings, Z. Huang, J. Krzywinski, R. Lindberg, H. Loos, A. Lutman, H.-D. Nuhn, D. Ratner, J. Rzepiela, D. Shu, Yu. Shvyd’ko, S. Spampinati, S. Stoupin, S. Terentyev, E. Trakhtenberg, D. Walz, J. Welch, J. Wu, A. Zholents and D. Zhu, “Demonstration of self-seeding in a hard-X-ray free-electron laser”, *Nat. Photon.* **6**, 693–698 (2012).
- G. Gatti, L. Giannessi, A. Mostacci, P. Musumeci, L. Palumbo, A. Petralia, V. Petrillo, R. Pompili, J. V. Rau, A. R. Rossi, C. Vaccarezza and F. Villa, “Large-bandwidth two-color free-electron laser driven by a comb-like electron beam”, *New J. Phys.* **16**, 033018 (2014).
- [24] A.A. Lutman, F.-J Decker, J. Arthur, M. Chollet, Y. Feng, J. Hastings, Z. Huang, H. Lemke, H.-D. Nuhn, A. Marinelli, J.L. Turner, S. Wakatsuki, J. Welch and D. Zhu, “Demonstration of Single-Crystal Self-Seeded Two-Color X-Ray Free-Electron Lasers”, *Phys. Rev. Lett.* **113**, 254801 (2014).
- [25] L. H. Yu, E. Johnson, D. Li and D. Umstadter, “Femtosecond free-electron laser by chirped pulse amplification”, *Phys. Rev. E* **49**, 4480 (1994).
- [26] F. Frassetto, L. Giannessi, and L. Poletto, “Compression of XUV FEL pulses in the few-femtosecond regime”, *Nucl. Instr. and Meth. A* **593**, 14–16 (2008).
- [27] C. Feng, L. Shen, M. Zhang, D. Wang, Z. Zhao and D. Xiang, “Chirped pulse amplification in a seeded free-electron laser for generating high-power ultra-short radiation”, *Nucl. Instr. and Meth. A* **712**, 113–119 (2013).
- [28] E. Oliva, M. Fajardo, L. Li, M. Pittman, T. T. T. Le, J. Gautier, G. Lambert, P. Velarde, D. Ros, S. Sebban and Ph. Zeitoun, “A proposal for multi-tens of GW fully coherent femtosecond soft X-ray lasers”, *Nat. Photon.* **6**, 764–767 (2012).