



**HAL**  
open science

## Modeling of the two-phase transport in PEM fuel cell

Erwan Tardy, Jean-Philippe Poirot, Pascal Schott, Christophe Morel,  
Guillaume Serre, Marion Chandesris, Yann Bultel

► **To cite this version:**

Erwan Tardy, Jean-Philippe Poirot, Pascal Schott, Christophe Morel, Guillaume Serre, et al.. Modeling of the two-phase transport in PEM fuel cell. 12th European Symposium on Electrochemical Engineering, Jun 2021, Leeuwarden, Netherlands. pp.38. cea-03526698

**HAL Id: cea-03526698**

**<https://hal-cea.archives-ouvertes.fr/cea-03526698>**

Submitted on 14 Jan 2022

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

## Modeling of the two-phase transport in PEM fuel cell

**E. Tardy<sup>1,2</sup>, J.-P. Poirot-Crouvezier<sup>2</sup>, P. Schott<sup>2</sup>, C. Morel<sup>2</sup>, G. Serre<sup>2</sup>, M. Chandesris<sup>2</sup>, Y. Bultel<sup>1</sup>**

<sup>1</sup>Univ. Grenoble Alpes, Univ. Savoie Mont Blanc, CNRS, Grenoble INP, LEPMI, F-38000 Grenoble, France

<sup>2</sup>Univ. Grenoble Alpes, CEA, LITEN, F-38000 Grenoble, France

The Proton Exchange Membrane Fuel Cell (PEMFC) is a promising candidate for many applications, either stationary or transportation. Of the many barriers, cost and durability represent two of the most significant challenges to achieving clean, reliable and cost-effective fuel cell systems. Effective management of the liquid water and heat produced in PEM fuel cells remains crucial to increase both its performance and durability. Indeed, significant liquid water and temperature variations over the cell surface area and among the cells may accelerate long-term structural problems such as micro-cracks in the membrane.

A two-phase multi-component model of a PEM fuel cell is developed. The model considers the cell as a multilayered system and each layer is accurately in-plane discretized to allow the simulation of local temperature and species heterogeneities, including liquid water. The objective of the model is the prediction of the distributions of current density, species concentrations, water content and temperature in all the components of the cell, while taking into account the real flow-field designs. The model can be compared to experimental temperature and current density data and liquid water measurement obtained from neutron imaging tests in several operating conditions.

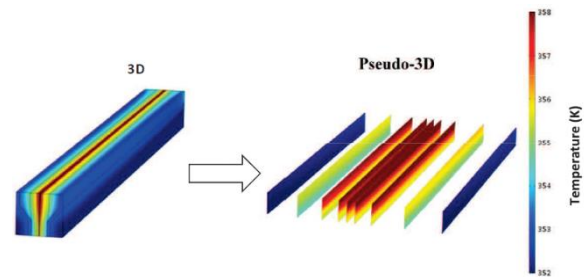


Figure 1 : 3D Model vs Pseudo-3D Model

Currently, the model is starting to deliver some results, which will be analyzed shortly but the calculation time is relatively long. Indeed, the 2-fluid model is complex since the transfer of mass, momentum and energy from one phase to another are implemented in the model. Therefore, it is necessary to find the appropriate closure laws, which are still widely discussed in the literature. In addition, the closure laws have a significant impact on the convergence of the model and the accuracy of the results.

[1] E. Tardy, F. Courtois, M. Chandesris, J.-P. Poirot-Crouvezier, A. Morin, Y. Bultel, Investigation of liquid water heterogeneities in large area PEM fuel cells using a pseudo-3D multiphysics model, *International Journal of Heat and Mass Transfer*, Volume 145, 2019, 118720, ISSN 0017-9310, <https://doi.org/10.1016/j.ijheatmasstransfer.2019.118720>

[2] F. Nandjou, J.-P. Poirot-Crouvezier, M. Chandesris, Y. Bultel, *International Journal of Hydrogen Energy*, **41** (2016) 15545-15561